

TH114 Series

Hydronic floor heating

With a slim contemporary design, the TH114 features an easy-to-read backlit display and precise temperature control



NON-PROGRAMMABLE

MODELS & RATINGS

TH114-A-024T	24 V	10 VA	R, C, W
TH114-AF-024T	24 V	10 VA	R, C, W

SPECIFICATIONS

TEMPERATURE CONTROL
 Microprocessor-optimized PIA
 Heating cycles: 15 minutes
 Accuracy: ± 0.5°C / 0.9°F

TEMPERATURE SETTING
 Manual
 °C or °F selectable

DIMENSIONS (H•W•D)
 124 x 70 x 23 mm / 4.9 x 2.8 x 0.9 inches
 Floor sensor (AF model): 4.6 m / 15 feet

FEATURES

Temperature control: 3 choices of temperature control in a single thermostat (AF models only)*

Advanced temperature control ensures total comfort by minimizing temperature swings


ON/STANDBY switch enables thermostat shutdown at the end of heating season for added security

Backlit display for easy reading

Battery free

Compatible with Aube electromechanical relays

INSTALLATION

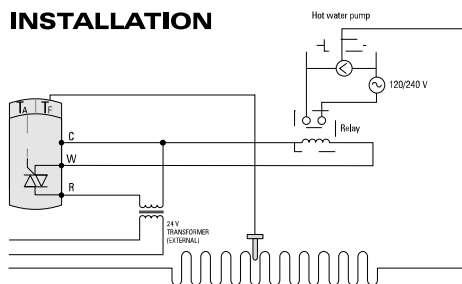

3 year warranty

Temperature control

- A models - control AMBIENT (room) temperature
- AF models - control AMBIENT (room) temperature or AMBIENT (room) temperature with possible limit on FLOOR temperature or FLOOR temperature*

* See "Aube floor heating thermostats" at beginning of section 1.2 for more details on temperature control